

10S抛光轮系列 10S Polishing Wheel Series

D1 10S抛光轮 10S Polishing Wheel	D2 10S抛光轮 10S Polishing Wheel	D3 进口10S抛光轮 Imported 10S Polishing Wheel
D4 红木轮 Polyurethane Wheel	D5 平行10S抛光轮 Peripheral 10S Polishing Wheel	D6 直线10S抛光轮 Peripheral 10S Polishing Wheel

功能：这类10S抛光轮（水松轮）、红木轮主要用于直边机，双边机，斜边机异形斜边机抛光。此抛光轮特别用于玻璃底板及倒角的精磨及抛光。


10S Polish wheel are mainly used for edging, double edging, beveling machine. They are special for fine polishing on bottom edge and chamfering polish.

水松轮规格参数 Technical Specification Size:(mm)

编号 Code	外径 D	孔径 H	玻璃厚度 T	粒度 G
D1/D2/D3	150	70	40、35、30	40、60、80
	130	60	35	40、60
	100	60	35	40、60
D4	150	70	30	40、60、80
D5	150	22	15、20、25、30	40、60、80
D6	200	90	15、20、25、30	40、60、80

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.

10S抛光轮工作示意图

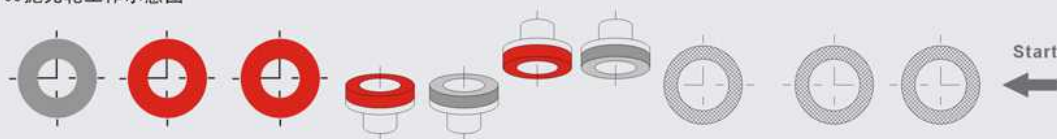

BK抛光轮系列 BK Polishing Wheel Series

		
E1 杯形BK抛光轮 BK Polishing Wheel	E2 平行BK抛光轮 Peripheral BK Polishing Wheel	E3 直线BK抛光轮 BK Polishing Wheel

BK抛光轮规格参数 Technical Specification Size:(mm)

编号 Code	外径 D	孔径 H	玻璃厚度 T	粒度 G
E1	150	70	40	46、60、80、120、180
	130	60	35	
E2	150、100	22	15、20、25、30	
	200	22		
E3	200	90		

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.

9R抛光轮系列 9R Polishing Wheel Series


		
F1 杯形 9R 抛光轮 Cup-shaped 9R Polishing Wheel	F2 直边9R抛光轮 Peripheral 9R Polishing Wheel	F3 9R抛光轮 9R Polishing Wheel

9R抛光轮规格参数 Technical Specification Size:(mm)

编号 Code	外径 D	孔径 H	玻璃厚度 T	粒度 G
F1	150	70	40、35、30	40、60、80
	130	60	35	40、60
	100	60	35	40、60
F2	150	22	15、20、25、30	40、60、80
F3	200	90	15、20、25、30	40、60、80

杯形9R抛光轮工作示意图

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.



BD抛光轮系列
BD Polishing Wheel Series

		
G1 平行BD抛光轮 BD Polishing Wheel	G2 BD刻花轮 BD Engraving Wheel	G3 直线BD抛光轮 BD Polishing Wheel (for straight-line pencil edge)
		BD抛光轮主要用在异形机上抛光，BD抛光轮特别用于家具玻璃、装饰玻璃及工艺玻璃的精细加工。同样用于底边抛光及倒角。BD“U”型和“V”型刻花轮，可用于机器刻花机。
G4 杯形BD抛光轮 BD Polishing Wheel	G5 特殊BD抛光轮 BD Polishing Wheel	

BD Polishing wheel is mainly used for polishing on Straight-line Edging Machine, Double Edging Machine and Shaped-beveling Machine. Especially, it's used for last finish on furniture glass, decoration glass and art glass. Also, it's suitable for bottom edge polishing and chamfering.

BD Engraving wheel, which has "U" and "V" shape, is suitable for engraving machine.

BD抛光轮规格参数 Technical Specification Size:(mm)			
编号 Code	外径 D	孔径 H	玻璃厚度 T
G1	100、150、200	22	15、20、25、30
G2	200、160、140	22、90	5、6、8、10、12、15、19、20、25
G3	200	90	15、20、25、30
G4	150、130	12、50	40、35
G5	50、35、30、25	12.7、12、10	25、30

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.

石头轮系列

Stone Polishing Wheel Series

		
H1 杯形石头轮 Stone Wheel	H2 杯形石头轮 Stone Wheel	H3 平行石头轮 Stone Wheel
		
H4 石头轮 Stone Wheel	H5 石头轮 Stone Wheel	H6 圆形石头轮 Stone Wheel



石头轮主要用于玻璃倒角用，前不需要用金刚轮，后面也不需要抛光轮，可以单独倒角，磨出来的效果非常光亮。因此，此产品可以大大节省公司生产成本。石头轮一经问世就受到广大企业的青睐。平行石头轮主要用于玻璃倒安全角，代替倒角BD轮，耐磨度更高。

Stone wheel series are mainly used for making and polishing arris as well, no need diamond wheel before it, only one wheel can obtain excellent performance on the arris. It's well welcomed by glass processing factories because it can save much cost. The peripheral one has longer life than BD polishing, which is mainly used for making and polishing safety arris of glass, so many factories always use it in place of BD polishing.


石头轮规格参数

Technical Specification Size:(mm)

编号 Code	外径 D	孔径 H	玻璃厚度 T
H1	150	12、50、70	40
H2	130	12、50、60	35、40
H4/H5	100	12、50	40
H3	100、150、200	22、25	15、20、25、30
H6	100	50、60	25、40

石头轮工作示意图

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.



羊毛轮系列
Felt Wheel Series

		
IA1 进口羊毛轮 Spiral Felt Wheel	IA2 优质羊毛轮 Spiral Felt Wheel	IA3 普通羊毛轮 Spiral Felt Wheel
		
IA4 进口羊毛轮 Spiral Felt Wheel	IA5 普通羊毛轮 Spiral Felt Wheel	IA6 特殊羊毛轮 Spiral Felt Wheel
		
IA7 澳洲纯羊毛轮 Pure Wool Felt	IA8 纯羊毛片 Felt Wheel	IA9 打蜡抛光羊毛轮 Spiral Felt Wheel


羊毛轮规格参数 Technical Specification Size:(mm)							
编号 Code	外径 D	孔径 H	玻璃厚度 T	编号 Code	外径 D	孔径 H	玻璃厚度 T
IA1	150	70、105	35、25	IA6	150	120	25
	185	70、115	35、30		150	22	40
IA2	150	70、105	35、25		200	22	40
	185	70、115	35、30		300	22	40
IA3	150	70、105、125	35、25	IA8	100	16	10
	185	70、115	35、30		150	70	35
IA4	200	70、115	35、30	IA9	150	70	35
IA5	185	70	25				

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.

精抛轮系列

Polishing Wheel Series

		
J1 CE-3	J2 X5000	J3 进口 AO轮 AO Polishing

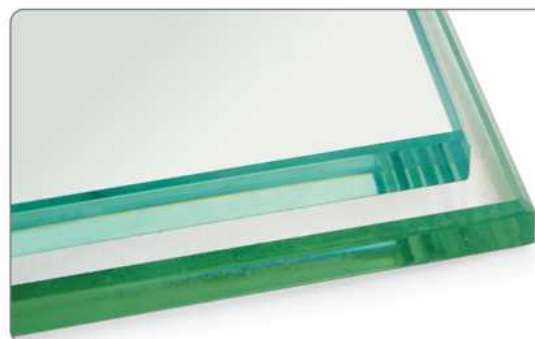

X5000和CE3用于直边机的最后一道抛光，抛光效果极好。

倒角X5000用于倒角位抛光，可代替倒角进口水松轮，亮度高！！

X5000 and CE-3 are used for the last position on straight-line edging machine for mirror polishing and have excellent polishing performance.


精抛轮规格参数

Technical Specification Size:(mm)

名称 Name	外径 D	孔径 H	玻璃厚度 T
J1 CE-3	150	70	40
J2 X-5000	150	70	30/40
	130	60	35
J3 AO轮	150	70/50	40

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.

精抛轮工作示意图

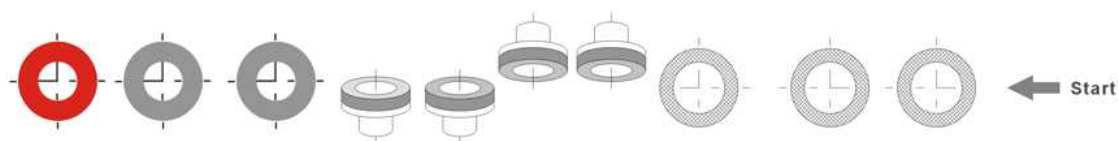

除膜轮系列

Coating Removal Wheel Series (removing the coat of coated glass)

		
K1 干磨除膜轮 Coating Removal Wheel (dry use)	K2 干磨除膜轮 Coating Removal Wheel (dry use)	K3 干磨除膜轮 Coating Removal Wheel (dry use)
		
K4 特殊规格除膜轮 Coating Removal Wheel (dry use)	K5 湿磨除膜轮 Coating Removal Wheel (wet use)	K6 湿磨除膜轮 Coating Removal Wheel (wet use)

除膜轮规格参数	Technical Specification	Size:(mm)	
编号 Code	外径 D	孔径 H	玻璃厚度 T
K1/K2/K3	200	76.2	8、10、12、15、 20、25、30
K4	65、55	5	
K5	200、150、100	22	15、20、25、30
K6	200	90	

注：特殊尺寸可按要求订做。
Remarks: Different specifications are available if request.



台式除膜机

用途：配合除膜轮用于镀膜玻璃加工时，除去玻璃边缘的金属层。

主要参数：

电源：单项交流 220V 55HZ

额定输入功率：2.2kW

空载转速：2800r/min

除膜轮：200*76.2*10mm...

宽度可调尺寸：10-100mm

厚度可调尺寸：可根据玻璃厚度
随意调节。

Table Coating Removal Machine

Application: Fix with coating removal wheel, it's special for removing the coating from glass surface.

Main technical parameters:

Power supply: AC220V, single phase, 55HZ

Rate Power Input: 2.2KW

Max. Rotate Speed: 2800rpm

Wheel size: 200×76.2×10mm

The range of coating removal size: 10-100mm

Glass thickness range: Thickness adjustable per the glass



手提式除膜机


额定输入功率：1050W

负载电流：5.3A

空载转速：600-3000r/min

除膜轮直径：200mm

Hand Coating Removal Machine:Rate Power Input: 1.05KW
No-load speed: 600-3000r/min Wheel diameter: 200mm



安华镀膜玻璃改进型除膜机，设备结构简洁，调整灵活，可随所需加工玻璃的厚度，尺寸随意调节，性能更加稳定，而且效率更高，设备采用优质除膜轮，除膜效果好，不会划伤玻璃。

The coating removal machine improved by ANHUA, which has simple structure, stable function with high efficiency. It's easier operated and can be adjusted according to glass thickness and size. Furthermore, it can obtain excellent removal performance by using high quality coating removal wheel.