



ALWAYSE

A FASTER CASTOR SERVICE!

- **Product Information**
- **Technical Advice**
- **Tailor-Made Systems**
- **Ex Stock Worldwide Delivery**
- **Full Range of Industrial
Wheels and Castors**



Alwayse Castor Company Ltd,
Miller Street, Birmingham B6 4NF.
United Kingdom

Tel: +44 (0) 121 380 4707.
Fax: +44 (0) 121 380 4709.
Email: castors@alwayse.co.uk
www.alwayse-floaton.co.uk

The World's

Widest range of Glass handling Castors



Why The World's Largest Glass Processor's use Alwaysse **FLOAT-ON™** Castors.

INSTANT DIRECTIONAL CHANGES




Ensures smooth movement of materials with delicate or polished surfaces.

DESIGNED FOR USE IN WET AND DRY CONDITIONS



BZP = Bright zinc plate can be used in most applications.
S/S Inox = Stainless steel Inox for the most arduous of conditions.

BALL OPTIONS

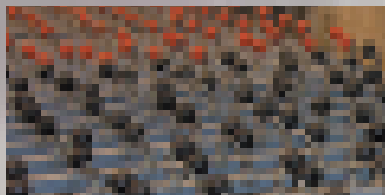

Red Polyurethane is harder wearing or Black Rubber for most other applications. **FLOAT-ON™** castors are used for easy handling of other flat sheet materials i.e. Granite, Wood, Plastic, Paper, card etc.

Our thanks to the following companies for allowing images to be taken in their premises for the production of this leaflet: Pilkington, Saint Gobain / Solaglass Darby Glass, and Unilam International.

MULTI CHOICE OPTIONS TO SUIT ALL APPLICATIONS

Complete Castors

	BLACK RUBBER
35MM BZP	ACR 35 R/H OR L/H
35MM S/S	ACR 35 R/H OR L/H S/S
50MM BZP	ACR 50 R/H OR L/H
50MM S/S	ACR 50 R/H OR L/H S/S



	RED POLYURETHANE
ACP 35 R/H OR L/H	
ACP 35 R/H OR L/H S/S	
ACP 50 R/H OR L/H	
ACP 50 R/H OR L/H S/S	



Balls Only

	BLACK RUBBER
35MM	ACR35B
50MM	ACR50B



	RED POLYURETHANE
ACP35B	
ACP50B	




Stem, Circlip, Washer and Ball Only

BZP	S/S
SCW 35 RB R/H OR L/H	SCW 35 RB R/H OR L/H S/S
SCW 50 RB R/H OR L/H	SCW 50 RB R/H OR L/H S/S
SCW 35 PB R/H OR L/H	SCW 35 PB R/H OR L/H S/S
SCW 50 PB R/H OR L/H	SCW 50 PB R/H OR L/H S/S



NOTE When ordering stems/ circlip/ washers or complete castors please state whether you require R/H right hand or L/H left hand.

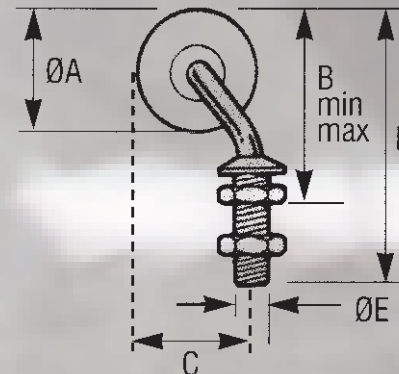

A Ømm	B mm		C mm	D mm	Load Cap Kgs	E Ømm
	min	max				
35	55	77	38	88	15	13.5
50	73	95	58	106	20	13.5

FIXING: Drill a 14mm dia. hole, Fix socket and adjust height

ALWAYSSE